

Basic

The peristaltic pump **Basic** is very quiet and can run dry. Not very sensitive to particles, it can work in polluted environments. The provided support allows its installation in false ceilings or directly on a wall. The pump is self-priming to a height of 2 metres. The pump is operated by a cooling signal. When the cooling switches off, the pump still functions during 3 minutes in order to evacuate the liquid which is in the condensate tray, then the pump stops.

The pump possesses a unique system to reform the Santoprene tubing. However, the shaft of the motor is supported by the cover to avoid deformation. We recommend to inspect the Santoprene tubing every 6 months or latest at the beginning of the season, and to change it every 12 months.




The **Basic** kit contains :

- 1 pump **Basic**
- 1 replacement pipe
- 1 anti-return valve
- 1 wall support
- 1 instruction manual (F-D-UK-I)
- 1 connector ID16
- 1 adapter with different diametres

Technical datas:

Max.flow rate : 6 l/h
Max.suction height : 2m CE
Max.delivery height : 10m CE
Voltage : 230V/50-60Hz
Power : 10 VA

Diagram of performances:

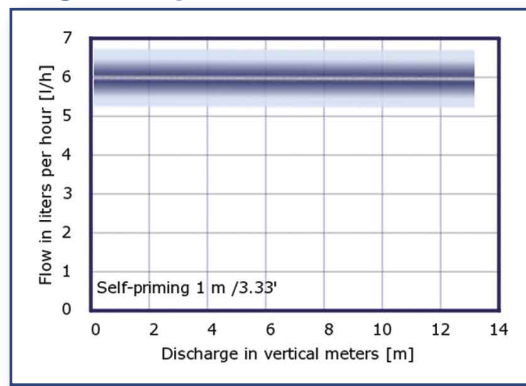

Installation pump with air conditioner or compressor:

